

1. Identification

Product identifier	Urethane Seam Sealer Grey	
Other means of identification		
Product code	RS-229	
Recommended use	Seam Sealer	
Recommended restrictions	No other uses are advised.	
Manufacturer/Importer/Supplier/Distributor information		
Manufacturer		
Company name	Medallion Refinish System	
Address	5751 N. Webster Street Dayton, OH 45414 United States	
Telephone	TECH SUPPORT	937-890-6547
	SALES	937-890-6547
	PHONE	800-257-6547
Website	www.medallion.omnispear.com	
E-mail	info@rubber-seal.net	
Emergency phone number	MAIN OFFICE: M-F 7:45am-4:30pm EMERGENCY 24 Hrs.	800-257-6547 800-424-9300 ChemTrec

2. Hazard(s) identification

Physical hazards	Not classified.	
Health hazards	Skin corrosion/irritation	Category 1
	Serious eye damage/eye irritation	Category 1
	Sensitization, respiratory	Category 1
	Sensitization, skin	Category 1A
	Germ cell mutagenicity	Category 1B
	Carcinogenicity	Category 1B
	Reproductive toxicity	Category 2
	Specific target organ toxicity, repeated exposure	Category 1
Environmental hazards	Hazardous to the aquatic environment, acute hazard	Category 3
	Hazardous to the aquatic environment, long-term hazard	Category 3
OSHA defined hazards	Not classified.	
Label elements		



Signal word

Danger

Hazard statement

Causes severe skin burns and eye damage. May cause an allergic skin reaction. Causes serious eye damage. May cause allergy or asthma symptoms or breathing difficulties if inhaled. May cause genetic defects. May cause cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not breathe dust/fume/gas/mist/vapors/spray. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Contaminated work clothing must not be allowed out of the workplace. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection. In case of inadequate ventilation wear respiratory protection.

Response

If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a poison center/doctor. If skin irritation or rash occurs: Get medical advice/attention. Wash contaminated clothing before reuse.

Storage

Store locked up.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC)

None known.

Supplemental information

32.5% of the mixture consists of component(s) of unknown acute oral toxicity. 32.5% of the mixture consists of component(s) of unknown acute dermal toxicity. 30% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 30% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Polyvinyl Chloride		9002-86-2	20 - < 30
BENZENE, DIMETHYL		1330-20-7	5 - < 10
Calcium Oxide		1305-78-8	1 - < 3
ETHYLBENZENE		100-41-4	1 - < 3
Petroleum Distillates, Hydrotreated Light		64742-47-8	1 - < 3
Titanium Dioxide		13463-67-7	1 - < 3
4, 4-Diphenylmethane diisocyanate MDI		101-68-8	< 1

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation

If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Oxygen or artificial respiration if needed. Do not use mouth-to-mouth method if victim inhaled the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. If experiencing respiratory symptoms: Call a POISON CENTER or doctor/physician.

Skin contact

Remove contaminated clothing immediately and wash skin with soap and water. Call a physician or poison control center immediately. Chemical burns must be treated by a physician. Wash contaminated clothing before reuse.

Eye contact

Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician or poison control center immediately.

Ingestion

Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

Most important symptoms/effects, acute and delayed

Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. Difficulty in breathing. Prolonged exposure may cause chronic effects.

Indication of immediate medical attention and special treatment needed

Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed.

General information

IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media	Foam. Powder. Carbon dioxide (CO ₂).
Unsuitable extinguishing media	Water.
Specific hazards arising from the chemical	During fire, gases hazardous to health may be formed.
Special protective equipment and precautions for firefighters	Self-contained breathing apparatus and full protective clothing must be worn in case of fire.
Fire fighting equipment/instructions	Move containers from fire area if you can do so without risk.
Specific methods	Use standard firefighting procedures and consider the hazards of other involved materials.
General fire hazards	No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.
Methods and materials for containment and cleaning up	Prevent product from entering drains. Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. Never return spills to original containers for re-use. Put material in suitable, covered, labeled containers. For waste disposal, see section 13 of the SDS.
Environmental precautions	Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling	Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes, on skin, or on clothing. Avoid breathing dust/fume/gas/mist/vapors/spray. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Provide adequate ventilation. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.
Conditions for safe storage, including any incompatibilities	Store locked up. Store in original tightly closed container. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

The following constituents are the only constituents of the product which have a PEL, TLV or other recommended exposure limit. At this time, the other constituents have no known exposure limits.

US. OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Components	Type	Value
Polyvinyl Chloride (CAS 9002-86-2)	STEL	5 ppm
	TWA	1 ppm

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8)	Ceiling	0.2 mg/m ³	
		0.02 ppm	

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
BENZENE, DIMETHYL (CAS 1330-20-7)	PEL	435 mg/m3	
		100 ppm	
Calcium Oxide (CAS 1305-78-8)	PEL	5 mg/m3	
ETHYLBENZENE (CAS 100-41-4)	PEL	435 mg/m3	
		100 ppm	
Petroleum Distillates, Hydrotreated Light (CAS 64742-47-8)	PEL	400 mg/m3	
		100 ppm	
Titanium Dioxide (CAS 13463-67-7)	PEL	15 mg/m3	Total dust.

US. OSHA Table Z-3 (29 CFR 1910.1000)

Components	Type	Value	Form
Titanium Dioxide (CAS 13463-67-7)	TWA	5 mg/m3	Respirable fraction.
		15 mg/m3	Total dust.
		50 mppcf	Total dust.
		15 mppcf	Respirable fraction.

US. ACGIH Threshold Limit Values

Components	Type	Value	Form
4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8)	TWA	0.005 ppm	
BENZENE, DIMETHYL (CAS 1330-20-7)	STEL	150 ppm	
	TWA	100 ppm	
Calcium Oxide (CAS 1305-78-8)	TWA	2 mg/m3	
ETHYLBENZENE (CAS 100-41-4)	TWA	20 ppm	
Polyvinyl Chloride (CAS 9002-86-2)	TWA	1 mg/m3	Respirable fraction.
Titanium Dioxide (CAS 13463-67-7)	TWA	10 mg/m3	

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8)	Ceiling	0.2 mg/m3
		0.02 ppm
	TWA	0.05 mg/m3
		0.005 ppm
Calcium Oxide (CAS 1305-78-8)	TWA	2 mg/m3
ETHYLBENZENE (CAS 100-41-4)	STEL	545 mg/m3
	TWA	125 ppm
		435 mg/m3
		100 ppm

Biological limit values
ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
BENZENE, DIMETHYL (CAS 1330-20-7)	1.5 g/g	Methylhippuric acids	Creatinine in urine	*

ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*

* - For sampling details, please see the source document.

Exposure guidelines	Occupational Exposure Limits are not relevant to the current physical form of the product.
Appropriate engineering controls	Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. General ventilation normally adequate. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection	Wear safety glasses with side shields (or goggles) and a face shield.
Skin protection	
Hand protection	Wear appropriate chemical resistant gloves.
Other	Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.
Respiratory protection	Wear positive pressure self-contained breathing apparatus (SCBA).
Thermal hazards	Wear appropriate thermal protective clothing, when necessary.



General hygiene considerations	Observe any medical surveillance requirements. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Contaminated work clothing should not be allowed out of the workplace.
---------------------------------------	---

9. Physical and chemical properties**Appearance**

Physical state	Solid.
Form	Solid. Paste.
Color	Grey
Odor	Not available.
Odor threshold	Not available.
pH	Not available.
Melting point/freezing point	Not available.
Initial boiling point and boiling range	278.6 °F (137 °C)
Flash point	104.0 - 131.0 °F (40.0 - 55.0 °C)
Evaporation rate	Not available.
Flammability (solid, gas)	Not available.
Upper/lower flammability or explosive limits	
Explosive limit - lower (%)	0.6 %
Explosive limit - upper (%)	7 %
Vapor pressure	10.65 hPa estimated
Vapor density	Not available.
Relative density	Not available.

Solubility(ies)	
Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	> 392 °F (> 200 °C)
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Density	1.17 g/cm3
Explosive properties	Not explosive.
Oxidizing properties	Not oxidizing.
Percent volatile	7.5 % estimated
Specific gravity	1.51 estimated

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Strong acids. Strong oxidizing agents. Halogens.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause irritation to the respiratory system. May cause allergy or asthma symptoms or breathing difficulties if inhaled.
Skin contact	Causes severe skin burns. May cause an allergic skin reaction.
Eye contact	Causes serious eye damage.
Ingestion	Causes digestive tract burns.

Symptoms related to the physical, chemical and toxicological characteristics	Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result. Difficulty in breathing.
---	--

Information on toxicological effects

Acute toxicity	Not known.
-----------------------	------------

Components	Species	Test Results
BENZENE, DIMETHYL (CAS 1330-20-7)		
Acute		
Oral		
LD50	Rat	3523 - 8600 mg/kg
ETHYLBENZENE (CAS 100-41-4)		
Acute		
Oral		
LD50	Rat	3500 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation	Causes severe skin burns and eye damage.
----------------------------------	--

Serious eye damage/eye irritation	Causes serious eye damage.
--	----------------------------

Respiratory or skin sensitization

Respiratory sensitization	May cause allergy or asthma symptoms or breathing difficulties if inhaled.
Skin sensitization	May cause an allergic skin reaction.

Germ cell mutagenicity May cause genetic defects.

Carcinogenicity May cause cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8)	3 Not classifiable as to carcinogenicity to humans.
BENZENE, DIMETHYL (CAS 1330-20-7)	3 Not classifiable as to carcinogenicity to humans.
ETHYLBENZENE (CAS 100-41-4)	2B Possibly carcinogenic to humans.
Polyvinyl Chloride (CAS 9002-86-2)	3 Not classifiable as to carcinogenicity to humans.
Titanium Dioxide (CAS 13463-67-7)	2B Possibly carcinogenic to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Polyvinyl Chloride (CAS 9002-86-2)	Cancer
------------------------------------	--------

US. National Toxicology Program (NTP) Report on Carcinogens

Not listed.

Reproductive toxicity Components in this product have been shown to cause birth defects and reproductive disorders in laboratory animals. Suspected of damaging fertility or the unborn child.

Specific target organ toxicity - single exposure Not classified.

Specific target organ toxicity - repeated exposure Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard Not an aspiration hazard.

Chronic effects Causes damage to organs through prolonged or repeated exposure. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Harmful to aquatic life with long lasting effects.

Components		Species	Test Results
BENZENE, DIMETHYL (CAS 1330-20-7)			
Aquatic			
Fish	LC50	Bluegill (Lepomis macrochirus)	7.711 - 9.591 mg/l, 96 hours
ETHYLBENZENE (CAS 100-41-4)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	1.37 - 4.4 mg/l, 48 hours
Fish	LC50	Fathead minnow (Pimephales promelas)	7.5 - 11 mg/l, 96 hours
Petroleum Distillates, Hydrotreated Light (CAS 64742-47-8)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia pulex)	2.7 - 5.1 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss)	2.9 mg/l, 96 hours
Titanium Dioxide (CAS 13463-67-7)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	> 1000 mg/l, 48 hours
Fish	LC50	Mummichog (Fundulus heteroclitus)	> 1000 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

BENZENE, DIMETHYL	3.12 - 3.2
ETHYLBENZENE	3.15

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport information

The following transportation information is provided based on the manufacturer's interpretation of shipping regulations. Each shipper is responsible for identifying, naming, marking, and labeling prior to offering for transport.

DOT

UN number	UN1325
UN proper shipping name	Flammable solids, organic, n.o.s.
Transport hazard class(es)	
Class	4.1
Subsidiary risk	-
Label(s)	4.1
Packing group	III
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Special provisions	A1, IB8, IP3, T1, TP33
Packaging exceptions	151
Packaging non bulk	213
Packaging bulk	240

IATA

UN number	UN1325
UN proper shipping name	Flammable solid, organic, n.o.s.
Transport hazard class(es)	
Class	4.1
Subsidiary risk	-
Packing group	III
Environmental hazards	No.
ERG Code	3L
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Other information	
Passenger and cargo aircraft	Allowed with restrictions.
Cargo aircraft only	Allowed with restrictions.


IMDG

UN number	UN2921
UN proper shipping name	CORROSIVE SOLID, FLAMMABLE, N.O.S. (Calcium Oxide)
Transport hazard class(es)	
Class	8
Subsidiary risk	4.1
Packing group	II
Environmental hazards	
Marine pollutant	No.
EmS	F-A, S-G
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code	Not applicable.


DOT



IATA



IMDG

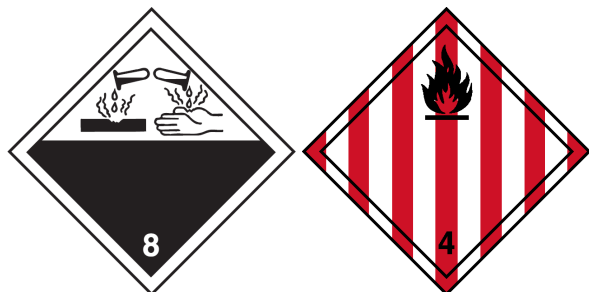

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

TSCA Chemical Action Plans, Chemicals of Concern

4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8) Methylene Diphenyl Diisocyanate (MDI) And Related Compounds Action Plan [RIN 2070-ZA15]

CERCLA Hazardous Substance List (40 CFR 302.4)

4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8) Listed.
BENZENE, DIMETHYL (CAS 1330-20-7) Listed.
ETHYLBENZENE (CAS 100-41-4) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Polyvinyl Chloride (CAS 9002-86-2) Cancer
Central nervous system
Liver
Blood
Flammability

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - No
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
4, 4-Diphenylmethane diisocyanate MDI	101-68-8	< 1
BENZENE, DIMETHYL	1330-20-7	5 - < 10
ETHYLBENZENE	100-41-4	1 - < 3

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8)
BENZENE, DIMETHYL (CAS 1330-20-7)
ETHYLBENZENE (CAS 100-41-4)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.

US state regulations

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

ETHYLBENZENE (CAS 100-41-4) Listed: June 11, 2004
Titanium Dioxide (CAS 13463-67-7) Listed: September 2, 2011

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

4, 4-Diphenylmethane diisocyanate MDI (CAS 101-68-8)
BENZENE, DIMETHYL (CAS 1330-20-7)
ETHYLBENZENE (CAS 100-41-4)
Titanium Dioxide (CAS 13463-67-7)

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-25-2017

Version # 01

Disclaimer Medallion Refinish System cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use.