
Tired of polishes that temporarily fill swirl marks and ultra fine scratches but allow them to return when exposed to water and the sun? Get the permanent solution to swirl marks and ultra fine scratches

Rubber-Seal's RS-671 Gloss Max Polish!







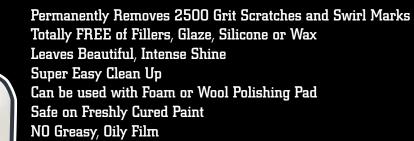

DIRECTIONS

Use on a 2' x 2' area. Lay down (2) 8" lines of RS-671 Gloss Max Polish. Your polishing pad should be set to run at 1200-1800 RPMs. We reccommend using an RS-641 Blue Foam-Vex Pad or an RS-644 Wool Polish Pad. When using a foam pad, begin by applying a light mist of water on the pad. While the buffer is NOT running, spread the polish around on the surface. Working in a "figure-eight" pattern, apply moderate pressure initially as you polish with your buffer, then reduce pressure as RS-671 Gloss Max Polish dries. Continue this process on 2' x 2' sections until the vehicle or vehicle section is completed. Use a damp RS-622-4 Micro Fiber Detailing Cloth to remove excess Gloss Max Polish from surface.

